


# Northfield Corp 1600SRV BANDOLIER FEEDER



The 1600SRV bandolier feeder enables bundled inserting of both 2D and 3D items that are produced in a continuous, perforated bandolier format. These items may include cards, coupons, soaker pads, vouchers and more.



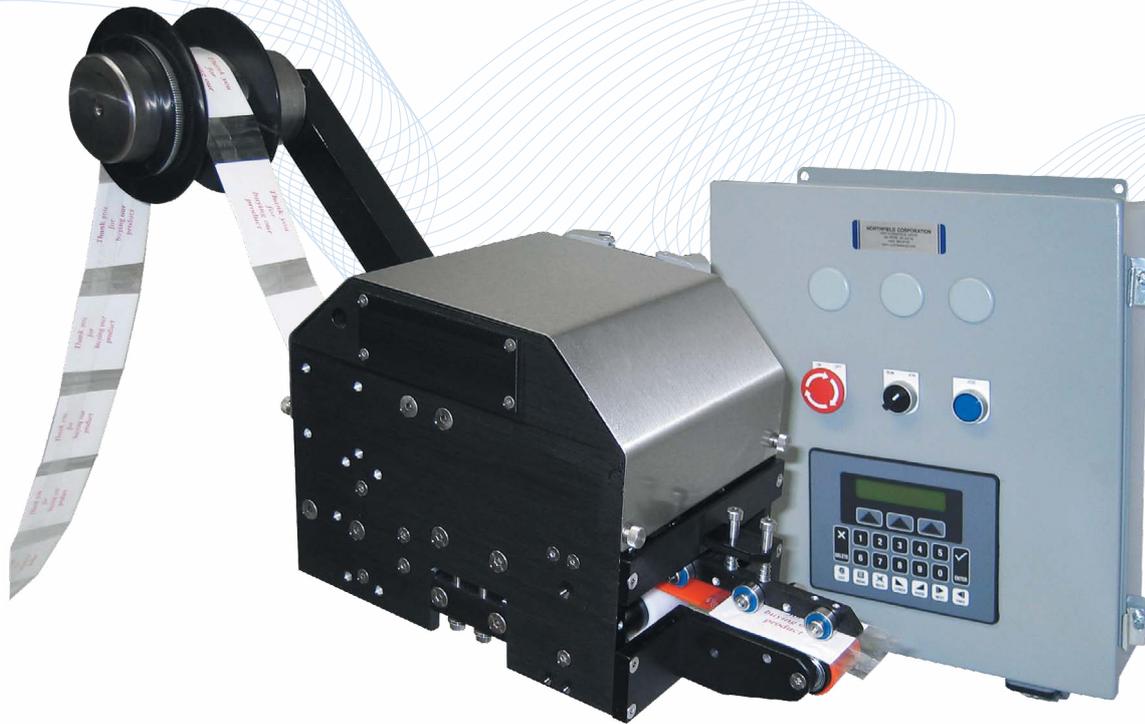


## TECHNICAL SPECIFICATIONS

- POWER: 240V, 5amps, 50/60hz
- MAX SPEED: Up to 900+ pieces per minute
- CONTROLS: Applied Motion; AC Servo Drives
- DIMENSIONS: 406mm x 355mm x 152.4mm

## STANDARD 2D INSERT DIMENSIONS & SPECIFICATIONS

- MINIMUM SIZE: 25.4mm x 25.4mm
- MAXIMUM SIZE: 101.6mm x 177.8mm
- THICKNESS: Up to 1.58mm
- SPLICES: Heat seal factory splices only
- BURST TENSILE STRENGTH: 25.5 - 53.3Nm

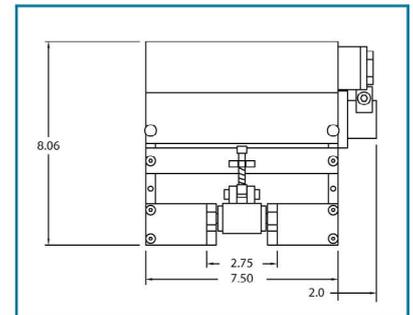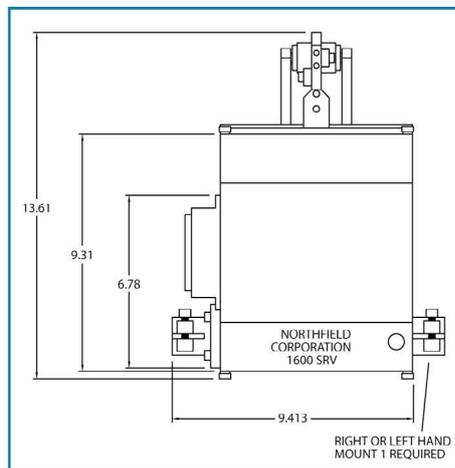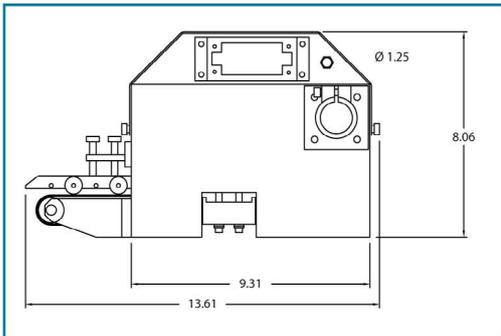

**IMPACT AUTOMATION SOLUTIONS**

Unit 2 | 52 Holker St, Silverwater NSW 2128 Australia

Phone: 02 9648 6000 | Website: [www.impactautomation.com.au](http://www.impactautomation.com.au)